

TOKU 



CONSTRUCTION & INDUSTRIAL TOOLS

Ver 2.02

TOKU PNEUMATIC CO., LTD.
www.toku-net.co.jp/en

LIGHTWEIGHT ROCK DRILL -11lb-

THD K FEATURES

- Compact and lightweight design with original technology for high power-to-weight ratio enables effective productivity
- Uniquely designed internal mechanism for excellent durability
- Screw-on retainer for secure operation
- Shock-absorbing handle is optionally available

OPTION
ANTI-VIBRATION
HANDLE



THD-1100N



K-10L

MEDIUM-WEIGHT ROCK DRILL -30lb and 40lb-

TJ FEATURES

- Forged housings and heat-treated internal parts for maximum durability
- Line-oiler is equipped as standard
- Shock absorbing handle and noise reduction muffler are optionally available (see page 2 for ergonomic series)



TJ-15



TJ-20

OPTIONAL MUFFLER

TJ-15




TJ-20



HEAVY-DUTY ROCK DRILL -60lb-

TS FEATURES

- Forged housings and heat-treated internal parts for maximum durability
- Built-in oiler for convenience
- 3 chuck sizes are available
- Step-less exhaust lever for better hole cleaning

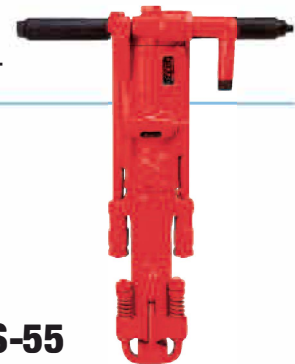

TS-55

SPECIFICATION

| MODEL | CHUCK SIZE inch | STROKE inch (mm) | BORE inch (mm) | IMPACT RATE B.P.M.(RPM) | WEIGHT lb (kg) | LENGTH inch (mm) | AIR CONSUMPTION CFM (m ³ /min) | AIR INLET inch | HOSE SIZE inch (mm) | BLOW TYPE |
|-----------|--------------------|---------------------|----------------------|----------------------------|-------------------|---------------------|--|-------------------|------------------------|-----------|
| THD-1100N | 7/8x3-1/4 | 1-1/4(31) | 1-1/2x7/8(38x22) | 3,200(350) | 11.4(5.2) | 16-1/2(420) | 28(0.8) | 3/8NPT | 1/2(12.7) | DRY |
| K-10L | 7/8x3-1/4 | 2(50.8) | 1-3/4x1-1/8(44.5x28) | 2,100(290) | 23(10.4) | 19(483) | 49(1.4) | 3/4NPT | 3/4(19) | DRY |

| MODEL | CHUCK SIZE inch | STROKE inch (mm) | BORE inch (mm) | IMPACT RATE B.P.M.(RPM) | WEIGHT lb (kg) | LENGTH inch (mm) | AIR CONSUMPTION CFM (m ³ /min) | AIR INLET inch | HOSE SIZE inch (mm) | BLOW TYPE |
|-------|------------------------|---------------------|-------------------|----------------------------|-------------------|---------------------|--|-------------------|------------------------|-----------|
| TJ-15 | 7/8x3-1/4 or 7/8x4-1/4 | 1-3/4(45) | 2-1/8(54) | 2,450(250) | 31(14) | 18-1/2(468) | 56(1.6) | 3/4 PT | 3/4(19) | DRY |
| TJ-20 | 7/8x4-1/4 | 1-15/16(49) | 2-11/16(68) | 2,400(200) | 41(18.5) | 24(610) | 87(2.5) | 3/4 PT | 3/4(19) | DRY |

| | | | | | | | | | | |
|-------|------------------------------------|------------|-------------|------------|--------|-------------|---------|--------|---------|-----|
| TS-55 | 7/8x3-1/4, 7/8x4-1/4 or 1x4-1/4 | 2-9/16(65) | 2-5/8(66.6) | 1,800(200) | 60(27) | 22-3/8(568) | 92(2.6) | 3/4 PT | 3/4(19) | DRY |
|-------|------------------------------------|------------|-------------|------------|--------|-------------|---------|--------|---------|-----|

Dynamic pressure: 90 PSI (0.6MPa) for all products