

TOKU 



CONSTRUCTION & INDUSTRIAL TOOLS

Ver 2.02


TOKU PNEUMATIC CO., LTD.
www.toku-net.co.jp/en

Toku offers versatile Sand Rammers and Backfill Tampers for various applications.

SAND RAMMER

TB FEATURES

- Compact and lightweight design provides comfortable operation.
- High bpm mechanism enables most effective production.
- Ideal for light construction compaction, compressing molds etc.
- Black oxide cylinder for extra durability and rust prevention
- Teasing throttle for precise control

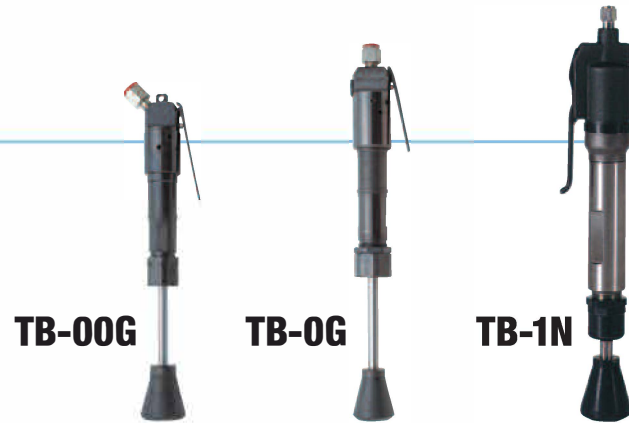

TF FEATURES

- Ideal for heavy compressing application and compacting soil around foundations and other structures
- Original plate valve system ensures reliable operation.
- Teasing throttle for precise control
- Heat-treated internal components for excellent durability



BACKFILL TAMPER

T FEATURES

- Well-balanced, easy to operate by one person
- Excellent choice for all types of backfill compacting work.
- Uniquely designed valve plate mechanism reduces kick back from the tool when operating.
- Heat-treated alloy steel cylinders offer superb durability



SPECIFICATION

MODEL	STROKE inch (mm)	BORE inch (mm)	IMPACTRATE B.P.M.	WEIGHT lb (kg)	LENGTH inch (mm)	BUTT DIA. inch (mm)	AIR CONSUMPTION CFM (m ³ /min)	AIR INLET inch (NPT)	HOSE SIZE inch (mm)
TB-00G	2(50)	3/4(18)	1,600	3.7(1.7)	11(280)	2(51.5)	8(0.25)	3/8	1/2 (12.7)
TB-0G	2-1/2(65)	7/8(22)	1,000	6(2.7)	15-1/2(395)	2-1/8(54)	10(0.3)	3/8	1/2 (12.7)
TB-1N	4(100)	1(25.4)	800	12(5.4)	20(510)	2-1/2(67)	22(0.7)	3/8	1/2 (12.7)
TF-1N	4(100)	1(25.4)	800	15(6.8)	42-1/8(1,070)	2-1/2(67)	22(0.7)	1/2	1/2 (12.7)
TF-2N	5(125)	1-1/4(32)	700	19.8(9)	43-1/2(1,105)	3(75)	27(0.85)	1/2	1/2 (12.7)
T-6	5-1/2(140)	1-1/2(38)	750	40(18)	49(1,240)	5-3/4(146)	35(1.1)	1/2	1/2 (12.7)

Dynamic pressure: 90 PSI (0.6MPa) for all products